

INCANDESCENT



800 Series – 12" Cube 150 Watts Maximum
900 Series – 14" Cube 200 Watts Maximum

*Rust Resistant
Post-Top
Luminaires*

Sleek, uncluttered lines in a contemporary form make these luminaires the natural choices for so many architectural environments. Using the finest thermoplastic polymers available, the cubes are handcrafted with expert precision. A greater $\frac{3}{8}$ " thickness enhances impact strength and structural beauty. The simple construction affords easy installation and a long life of maintenance-free service. Impressive atop a post or wall bracket.

Specifications

Lens Enclosure: Standard in UV-stabilized, impact-resistant acrylic. Colors available are clear, opal white, or smoke bronze. Cubes are provided with four captive stainless steel screws which allow for retention to post fitter by 8-32 brass hex head cap screws.

Post Fitter: Injection molded UV-stabilized, noncorrosive and nonconductive **polycarbonate** in black or bronze. Provided with 3 stainless steel tamperproof set screws for attachment to any 3" O.D. post.

Socket: Medium base ceramic with nickel-plated copper screw shell, rated 250V, 660W with silicone braid leads.


Lamp: Uses Type A-19 up to 100W; Type A-21 for 150W; Type A-23 for 200W. (Provided by others.)
LED Information: Type A-19 LED Lamps available for purchase from W. F. Harris Lighting, Inc. in 5000K and Dimmable 2700K color temperatures. Lamp manufacturer rated for 10,9500 through 25,000 hours of 24/7 life, lamp and application dependent.

Diffuser: (optional) Prismatic diffuser softens the lamp image and enhances appearance and the general distribution of light in translucent lenses. Lexan® **polycarbonate** diffuser suitable for 75W maximum.

Wall Bracket: (optional) Aluminum or steel welded construction in black or bronze painted finish. Base measures 6" x 9" and arm measures 2" wide x 3" high x 10" long. Stem comes in 6" or 14" lengths.



800-CL shown with post fitter.

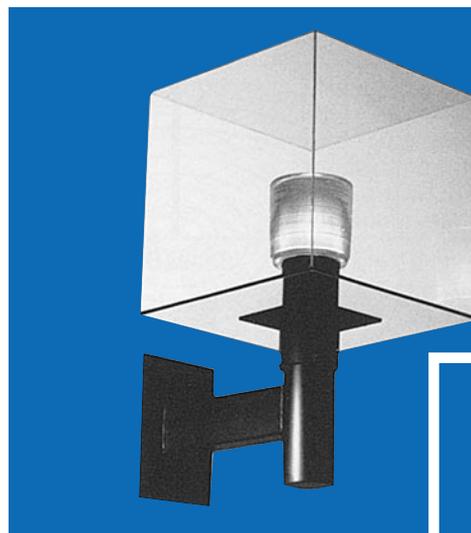

900-CL on 14" stem wall bracket.
Inset shows short-stem wall bracket.



**SBA QUALIFIED
SMALL BUSINESS MANUFACTURER**

TAA COMPLIANT
TRADE AGREEMENT ACT COMPLIANT

ETL Listed For Wet Locations.

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94HB or better on lenses and the superior 94-5V rating on housings.

Luminaire Type _____
Catalog Number _____
Job Name _____
Approval _____

WF Harris Lighting, Inc.™

Innovative Lighting Designs Since 1970
P.O. Box 5023, Monroe, NC 28111-5023, USA
704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)
e-mail: customerservice@wfarris.com
www.wfharrislighting.com

Form 1532

6/19

"A Live Operator Company Standing Ready to Serve Your Lighting Needs."

INCANDESCENT

Ordering Information (Fill In Blanks For Complete Catalog Number)

Model	Lens	Fitter	Watts-Lamp	Options
Model	Lens Color	Fitter	Watts-Lamp	Options
800 900	OW-Opal White CL-Clear BZ-Bronze CLB-Clear Bottom with Colored Lens ¹	FK-Black FZ-Bronze	150-INC ³ 200-INC ^{2,3}	PC-Photo Control PD7-75W Max. Polycarbonate Diffuser ASWBK-6" Aluminum Short-Stem Black Wall Bracket ³ SSWBK-6" Steel Short-Stem Black Wall Bracket ³ SMWBK-14" Steel Medium-Stem Black Wall Bracket ³ GRAPHICS-Numbers, Symbols, Letters, Logos

¹Ordering Example: OW/CLB

²N/A for 800 Series

³Provided by Others

Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.



**SBA QUALIFIED
SMALL BUSINESS MANUFACTURER**

TAA COMPLIANT
TRADE AGREEMENT ACT COMPLIANT

W.F. Harris Lighting, Inc.™

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA

704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE)

e-mail: customerservice@wfharris.com

www.wfharrislighting.com

“W. F. Harris Lighting Will Not Sacrifice Quality for the Sake of Price.”